

Dane aktualne na dzień: 30-09-2026 03:11

Link do produktu: <https://www.poweraudio.pl/sb-acoustics-satori-mr13pnw-4-p-5561.html>



SB Acoustics SATORI MR13PNW-4


Cena	792,41 zł
Czas wysyłki	Do 3 dni
Kod producenta	060-2011
Producent	SB Acoustics

Opis produktu





- Vented aerodynamic cast aluminium chassis for optimum strength and low compression
- Proprietary cone material with EGYPTIAN PAPYRUS fibres made in-house
- Soft low damping rubber surround for optimum transient response
- Advanced BIMAX spider for improved linearity
- Powerful optimized low distortion neodymium motor system
- Non-conducting fibre glass voice coil former for minimum damping
- Extended copper sleeve on pole piece for low inductance and reduced distortion
- CCAW voice coil for reduced moving mass
- Long life silver lead wires attached 180° apart for improved stability
- Vented pole piece and coil former for reduced compression
- High piston to chassis diameter ratio
- Gasket and bolt hole protrusions for reduced coupling to speaker cabinet

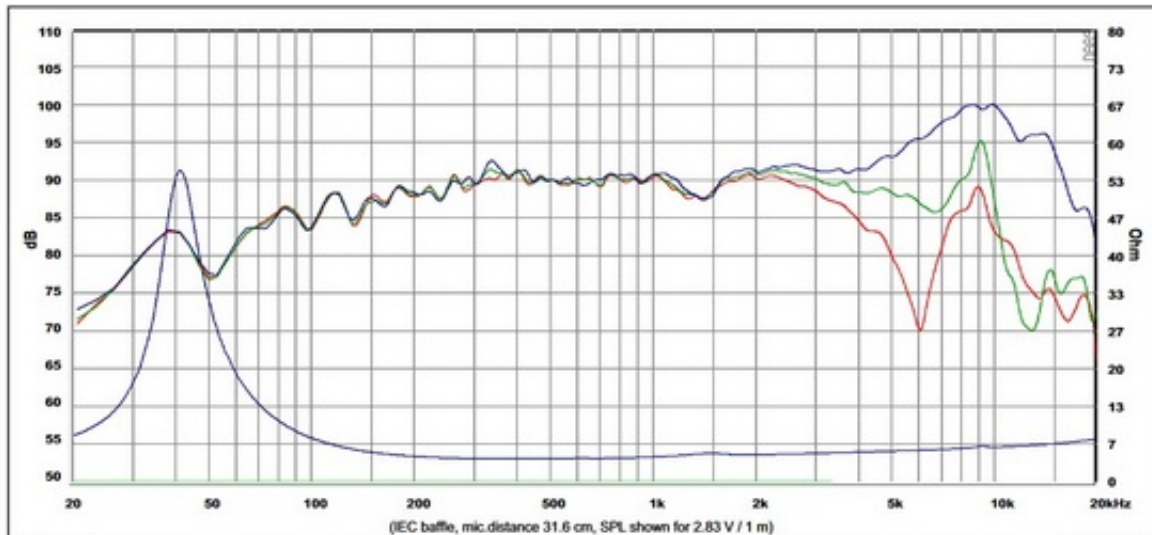

Response Cur
— (Blue) : 1

Nominal Impedance	4 Ω	Free air resonance, F_s	41 Hz
DC resistance, R_e	3.3 Ω	Sensitivity (2.83 V/1m)	91 dB
Voice coil inductance, L_e	0.11 mH	Mechanical Q-factor, Q_{ms}	2.8
Effective piston area, S_d	70 cm ²	Electrical Q-factor, Q_{es}	0.25
Voice coil diameter	30.5 mm	Total Q-factor, Q_{ts}	0.23
Voice coil height	11 mm	Moving mass incl. air, M_{ms}	5.4 g
Air gap height	5 mm	Force factor, Bl	4.3 Tm
Linear coil travel (p-p)	6 mm	Equivalent volume, V_{as}	19.4 liters
Magnetic flux density	1.08 T	Compliance, C_{ms}	2.79 mm/N
Magnet weight	0.1 kg	Mechanical loss, R_{ms}	0.5 kg/s
Net weight	0.78 kg	Rated power handling*	30 W

* IEC 268-5, high-pass Butterworth, 200 Hz, 12 dB/oct.

